

# TENSION FABRIC DISPLAY INSTRUCTIONS

Works for the Tension 24", 36", 48", & 60"

1



Black padded carrying case.

2



Remove frame parts from the bag.

3



Assemble by connecting the tubes together. Some tubes are connected with bungee cords—align the tubes and gently pull them together.

4



Frame is now assembled.

5




To install the graphic, slide the graphic from the top of the frame towards the bottom.

6



Zip the bottom of the graphic.

7

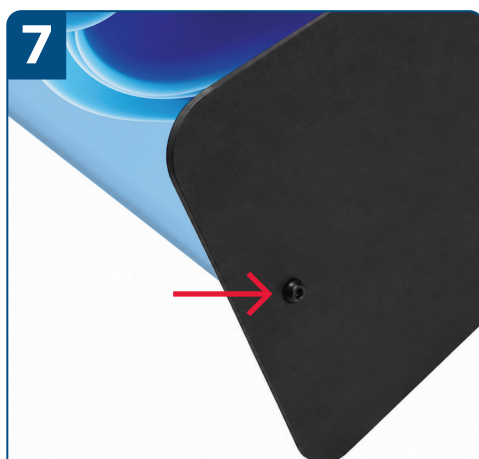

Attach base with provided screws. Alan Key included.

8



Completed Tension Frame with graphic.